


# METHOD FOR RELAYING MESSAGE BETWEEN NETWORKS

Patent number: JP8172446  
 Publication date: 1996-07-02  
 Inventor: YAMASHITA HIROYUKI; YAMASHITA MASAHIDE; TSUKADA MANABU  
 Applicant: NIPPON TELEGR & TELEPH CORP <NTT>  
 Classification:  
 - international: H04L12/42; G06F13/00  
 - european:  
 Application number: JP19940315383 19941219  
 Priority number(s):

## Abstract of JP8172446

**PURPOSE:** To enable an appropriate processing node to surely receive and process a message when the node is present in the same sub-network.  
**CONSTITUTION:** Nodes 111 and 112 for a processing and the node 310 for relay are connected to the sub-network 10, the node 320 for the relay and the nodes 211-214 for the processing are connected to the sub-network 20 similarly and they are respectively logically circularly connected. Also, the nodes 310 and 320 for the relay are connected to the sub-network 30 for the relay. A cyclic counter area is provided in the message in addition to a destination address, an origin address and data. A message emission node adds one to the cyclic counter area in the message every time the message is circulated once in the present sub-network. The node for the relay relays and transfers the message only when the value of the cyclic counter area of the inputted message exceeds a prescribed value.

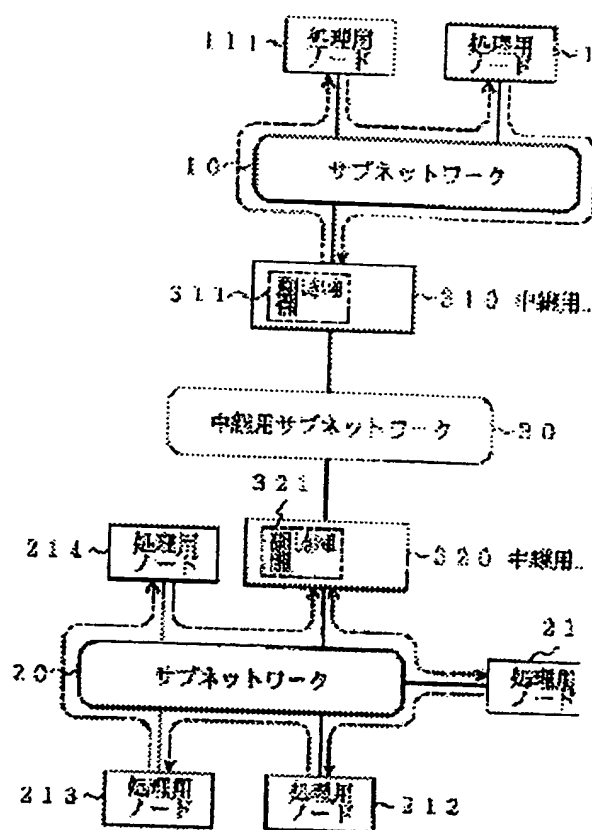

BEST AVAILABLE COPY

PAT-NO: JP408172446A  
DOCUMENT-IDENTIFIER: JP 08172446 A  
TITLE: METHOD FOR RELAYING MESSAGE BETWEEN  
NETWORKS  
PUBN-DATE: July 2, 1996

INVENTOR-INFORMATION:  
NAME  
YAMASHITA, HIROYUKI  
YAMASHITA, MASAhide  
TSUKADA, MANABU

ASSIGNEE-INFORMATION:  
NAME  
NIPPON TELEGR & TELEPH CORP <NTT>  
COUNTRY  
N/A

APPL-NO: JP06315383  
APPL-DATE: December 19, 1994

INT-CL (IPC): H04L012/42, G06F013/00

ABSTRACT:

PURPOSE: To enable an appropriate processing node to surely receive and process a message when the node is present in the same sub-network.

CONSTITUTION: Nodes 111 and 112 for a processing and the node 310 for relay are connected to the sub-network 10, the node 320 for the relay and the nodes 211-214 for the processing are connected to the sub-network 20 similarly and they are respectively logically circularly connected.

**BEST AVAILABLE COPY**

Also, the nodes 310 and 320 for the relay are connected to the sub-network 30 for the relay. A cyclic counter area is provided in the message in addition to a destination address, an origin address and data. A message emission node adds one to the cyclic counter area in the message every time the message is circulated once in the present sub-network. The node for the relay relays and transfers the message only when the value of the cyclic counter area of the inputted message exceeds a prescribed value.

COPYRIGHT: (C) 1996, JPO

**BEST AVAILABLE COPY**